

TECHNICAL DATA SHEET

CR235-HD



Applications



CYCLIC




SOLAR



MARINE

AVAILABLE TERMINAL STYLES:

Standard (STD)




Type S




VENT CAP OPTIONS:

Bayonet - Standard



SnapCap



SPW Manifold Vent



PHYSICAL SPECIFICATIONS

BCI Group Size	Model Description	Nominal Voltage	Length		Width		Container Height		Terminal Height		Weight		Cover & Container Material	Case to Cover Seal Method
			in	mm	in	mm	in	mm	in	mm	lbs	kgs		
GC2	CR235-HD	6	10.25	260	7.06	179	9.88	251	10.94	278	63	28.6	Polypropylene Plastic	Heat Seal

ELECTRICAL SPECIFICATIONS

Ampere Hour Capacity (Ah)				Reserve Capacity Minutes			Storage	
100-Hr	20-Hr	10-Hr	5-Hr	75-Amps	56-Amps	25-Amps	kWh' 100-Hr	kWh' 20-Hr
260	235	199	185	122	-	450	1.51	1.37

SUSTAINABILITY

- ▶ Fully Recyclable
- ▶ Do Not Discard



CHARGING INSTRUCTIONS

We specify the following standard battery charge profile for the CR235-HD deep cycle battery when used in electric vehicle (EV) or motive power service:

Phase 1: Constant Current (I1) I1 = < 45 amps [Max Bulk Current]
Normal transition to Phase 2 at 2.42 Volts Per Cell.

Safety transition to END OF CHARGE of $dV / dt < 0V / 1 \text{ hr}$, $dt = 1 \text{ hr}$. (NEGATIVE SLOPE).

Timeout for Phase 1 = 10 hours.

Phase 2: Constant Voltage (U2) U2 = 2.42 VPC

Normal Transition to Phase 3 at I2 = < 6.0 amps

Safety transition to END OF CHARGE of $dI / dt < 0.4 \text{ amp} / 1 \text{ hr}$, $dt = 1 \text{ hr}$

Phase 3: Constant Current (I3) I3 = 6.0 amps [Finish Current]

Normal transition to END OF CHARGE by $dV / dt < 0.007V / \text{cell} / 1 \text{ hr}$, $dt = 1 \text{ hr}$.

Timeout for charging phases 1 - 3 at 16 hours.

Temperature compensation coefficient = $\pm 3 \text{ mV} / ^\circ\text{C}$.

Recommended Equalization Charge: Every seven (7) days. 3 additional hours at normal "Finish Current" for 3 hours.

Safety transition to END OF CHARGE at maximum voltage of 2.75 VPC.




TECHNICAL DATA SHEET

CR235-HD

APPLICATION RECOMMENDATIONS

Specific Gravity	Operating Temperature Range	Self Discharge	Terminal Torque Specifications
Fully charge battery specific gravity (100% SOC) is 1.265 Fully discharged battery specific gravity in a high rate discharge application (+50A) is 1.145 Fully discharged battery specific gravity in a low-rate discharge application (-40A) is 1.045	-40°F to 120°F (-40°C to 49°C). Flooded lead acid battery capacities are temperature sensitive: refer to the temperature / capacity projection chart below to identify available capacity at the application operating temperature. APPLICATION NOTE: Maintain a state of charge greater than 60% when operating flooded lead acid batteries at temperatures below 32°F (0°C).	Fully charged batteries that are stored at a temperature of 80°F (27°C) will self-discharge at a rate of 3.5% per week.	SAE / Automotive Terminal Style: 50 to 70 in-lbs / 6 to 8 Nm Stainless Threaded Terminal : 100 to 120 in-lbs / 11 to 14 Nm


APPLICATION NOTE: Lead acid batteries contain corrosive battery electrolyte and generate highly flammable hydrogen gas. When working near batteries wear protective clothing, gloves, and safety glasses when handling batteries and electrolyte and always work in a well-ventilated area. Do not over-torque terminals. Over-torque can result in terminal damage, breakage, terminal meltdown or fire. Flooded lead acid deep cycle batteries require periodic preventative maintenance and effective charging service to ensure dependable service life.

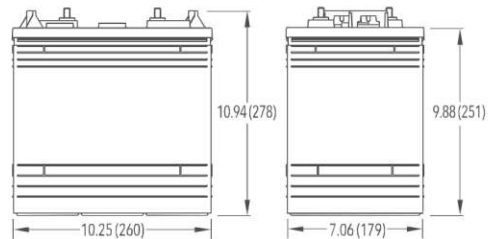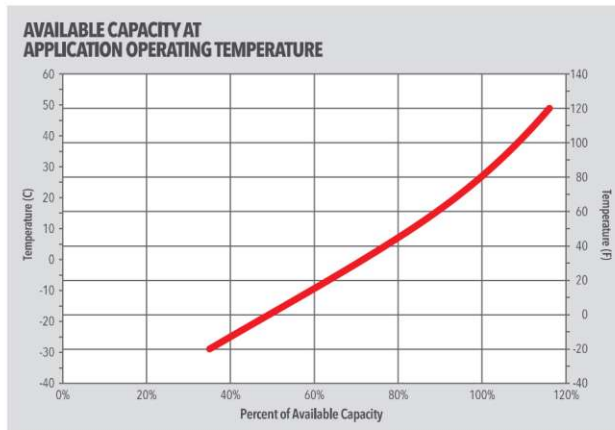

TYPICAL BATTERY CYCLE LIFE / DEPTH OF DISCHARGE

Battery Model	80% DOD Cycles	1.80 VPC	50% DOD Cycles	End-Cycle Voltage	40% DOD Cycles	End-Cycle Voltage	20% DOD Cycles	End-Cycle Voltage
CR235-HD	650	1.85 VPC	1200	1.94 VPC	1500	1.97 VPC	3000	2.05 VPC

The battery life references presented above are estimations based upon stationary life cycle testing conducted at our testing Center. The data references are nominal and should not be construed as maximum or minimum values for specifications or for final design. Data for this product type may vary from that shown herein, and the manufacturer makes no warranties – expressed or implied – based upon the data shown above.

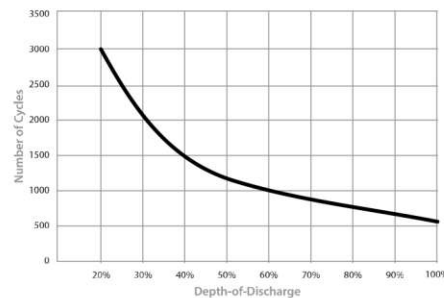

Effect of Battery Temperature on Battery Life

Lead acid batteries are electrochemical storage devices that store and release chemical energy upon demand in the form of electricity. By virtue of their design lead acid batteries are highly reactive to temperature – with the rate of chemical reactions that occur within the battery being affected by the operating temperature where the battery is used. Higher operating temperatures will result in faster chemical reactions within the battery – delivering improved discharge performance; conversely, cooler operating temperatures will result in slower internal chemistry. However, higher operating temperatures also result in shortened battery life as the increased rate of chemical reactions will accelerate the rate of deterioration of internal components. Typical battery life is based upon a baseline operating temperature of 80°F / 27°C. Temperature increases of 15°F / 10°C over the baseline will cause the battery's rate of internal chemical reactions to double – something that will reduce battery life due to the accelerated deterioration of internal components. Please contact the manufacturer to discuss any minimal requirements for battery life when operating batteries in temperatures greater than 80°F / 27°C.